



CROSS49 SUPPLIES & RENTALS PIPE BENDING MACHINES

PIPELINE

Cross49 offers industry leading DMI pipe bending machines able to bend pipe up to 48".

DMI OPEN FACE 6-20

- Hydraulic Mandrel connection with 3/8" quick disconnect couplings
- TI Steel body construction for long life and extra strength
- Calibrated Indicator Rod for precise repeatable pipe bends
- Single operator control station for all functions
- PTFE sealing system in all cylinders
- Designed to bend all grades of API-5L pipe within its range
- Easily towed on the right of way by a suitable tractor
- Towing eye can be raised and lowered by actuating the Stiffback controls

Length w/tires 15'-10" 4,826mm
Width 7'-7" 2,311mm
Height 7'-8" 2,337mm
Weight (lbs/kg) 12,700lbs 5,773kg
Pneumatic Tire Size 11.0 x 16



DMI 6-20

- Hydraulic Mandrel connection with 3/8" quick disconnect couplings
- TI Steel body construction for extra life and strength
- Calibrated Indicator Rod for precise repeatable bends
- Single operator control station for all functions
- PTFE sealing system in all cylinders
- Designed to bend all grades of API-5L pipe
- Easily towed on the right of way by a suitable tractor
- Towing eye can be raised and lowered by actuating the Stiffback controls

Length w/tires 19'-4" 5,588 mm
Width 7'-6" 2,286 mm
Height 7'-8" 2,337 mm
Weight w/Tires (lbs/kg) 14,160 lbs 6,436 kg
Pneumatic Tire Size 11.0 x 16
Weight w/Tracks (lbs/kg) 16,400 lbs 7,439 kg
Track Size 10 Ton




DMI 16-30



Length 22'-6" 6,858 mm
Width 8'-3" 2,515 mm
Height 9'-1" 2,768 mm
Weight (lbs/kg) 29,500 lbs 13,409 kg
Track Size 15 Ton

- Hydraulic Mandrel connections available with five section valve
- Two Stage Pump standard
- TI Steel body construction for long life and extra strength
- Calibrated Indicator Rod for precise repeatable pipe bends
- Single operator control station for all functions
- PTFE sealing system in all cylinders
- Designed to bend all grades of API-5L pipe within its range
- Easily towed on the right of way by a suitable tractor
- Towing eye can be raised and lowered by actuating the Stiffback controls
- Hydraulic Pilot Controlled valve system
- Safety steps provide access to pipe from

DMI 22-36

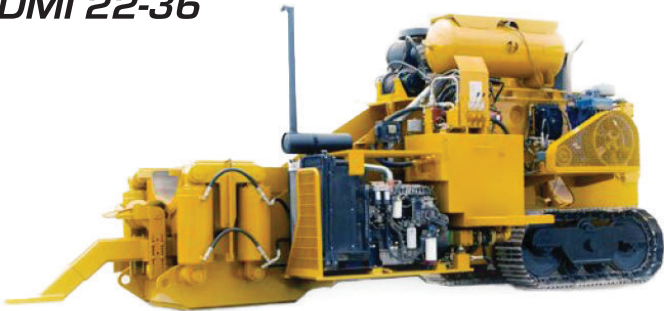

Length 24'-1" 7,340 mm
Width 8'-8" 2,642 mm
Height 10'-0" 3,048 mm
Weight (lbs/kg) 57,000 lbs 25,909 kg
Track Size 15 Ton

- Two Stage Pump
- TI Steel Body Construction for long life and extra strength
- Calibrated Indicator Rod for precise repeatable pipe bends
- Single operator control station for all functions
- PTFE sealing system in all cylinders
- Designed to bend all grades of API-5L pipe within its range
- Easily towed on the right of way by a suitable tractor
- Towing eye can be raised and lowered by actuating the Stiffback controls
- Control valve sections sized for precise flow and metering

DMI 36-48



Length 32'-3" 9,830 mm
Width 12'-6" * 3,810 mm
Height 10'-10" 3,302 mm
Weight (lbs/kg) 120,750 lbs 54,886 kg
Track Size 50 Ton

- Two-Stage Pump
- TI Steel body construction for long life and extra strength
- Calibrated Indicator Rod for precise repeatable pipe bends
- Single operator control station for all functions PTFE sealing system in all cylinders
- Designed to bend all grades of API-5L pipe within its range
- Easily towed on the right of way by a suitable tractor
- Towing eye can be raised and lowered by actuating the Stiffback controls
- Hydraulic remote controls valve system
- Bend pressure control at operator console